

## Model FP2000

### Configurable Pressure Transducer



#### DESCRIPTION

The FP2000 series is a configurable differential pressure transducer which allows the customer to select the configuration which best fits the needs of the application. Choose from multiple accuracies, outputs, pressure ports, electrical terminations, and pressure ranges.

The FP2000 is available with gage, absolute, barometric, vacuum reference, or differential (wet/wet, wet/dry) and, best of all, they deliver in two weeks or less.



#### FEATURES

- mV/V, 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, 4 mA to 20 mA
- Gage, absolute, barometric, vacuum
- Differential (wet/wet, wet/dry)
- Intrinsically safe option<sup>5</sup>
- CE available<sup>6</sup>

FP2000 pressure sensors are custom built from stocked components, and most are shipped in 10 business days or less. Please see <http://measurementsensors.honeywell.com> for updated listings

# Model FP2000

## PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Accuracy <sup>1</sup>	See accuracy table
Output (selectable)	mV/V (see accuracy table), 0 Vdc to 5 Vdc, 0 Vdc to 10 Vdc, or 4 mA to 20 mA (two wire)
Resolution	Infinite

## ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Excitation (calibration)	
Amplified (4 mA to 20 mA; 0 Vdc to 5 Vdc)	9 Vdc to 28 Vdc
Amplified (0 Vdc to 10 Vdc)	15 Vdc to 28 Vdc
Unamplified (mV/V)	10 Vdc


## MECHANICAL SPECIFICATIONS

Characteristic	Measure
Media	Gas, liquid
Overload - safe	
positive (+) direction	4X full scale or 3000 psi, whichever is less
negative (-) direction	4X full scale or 250 psi, whichever is less
Overload - burst	
positive (+) direction	3000 psi
negative (-) direction	500 psi
Pressure port	200 % over capacity
Wetted parts material	Ha C276 & 316L stainless steel

## ENVIRONMENTAL SPECIFICATIONS

Order Code	Range	Temperature, Compensated	Temperature, Operating <i>Unamplified Output:</i> <i>Option 2U</i>	Temperature, Operating <i>Voltage Output:</i> <i>Option 2D,2E,2F,2G</i> <i>Current Output:</i> <i>Option 2P,2Y,2N</i>
FDD	less than 1 psi	10 °C to 45 °C [50 °F to 110 °F]	-40 °C to 116 °C [-40 °F to 240 °F]	-29 °C to 85 °C [-20 °F to 185 °F]
	1 psi and less than 5 psi	5 °C to 50 °C [40 °F to 120 °F]		
	5 psi and above	5 °C to 60 °C [40 °F to 140 °F]		
FDW	less than 1 psi	10 °C to 45 °C [50 °F to 110 °F]	-40 °C to 116 °C [-40 °F to 240 °F]	-29 °C to 85 °C [-20 °F to 185 °F]
	1 psi and less than 5 psi	5 °C to 50 °C [40 °F to 120 °F]		
	5 psi and above	5 °C to 60 °C [40 °F to 140 °F]		
Temperature, error band	0.10 % accuracy	±0.5 % full scale	—	—
	0.25 % accuracy	±1.0 % full scale	—	—

## TYPICAL SYSTEM DIAGRAM

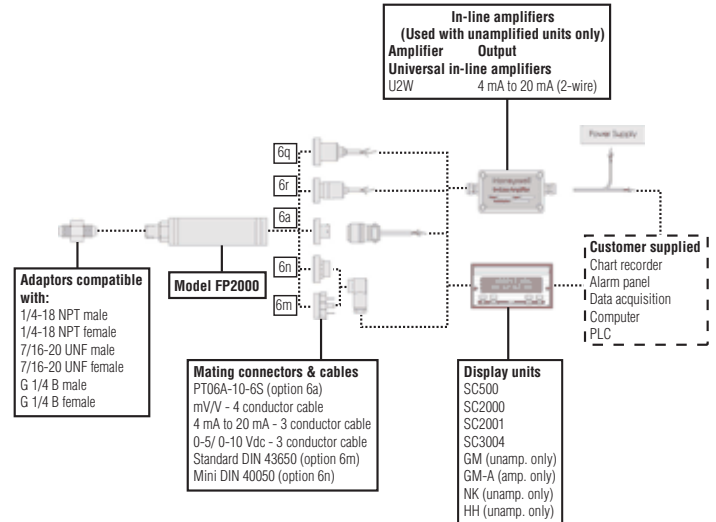

## Configurable Pressure Transducer

### PRESSURE RANGES AND RANGE CODES

	psi	Range code	torr	Range code	mBar	Range code	kPa	Range code	Bar	Range code	in Hg	Range code	mm Hg	Range code	in H <sub>2</sub> O	Range code
<b>Gage/ Absolute</b>	0.5*	AN	15**	HA	35**	JA	2**	KA	0.035**	MA	1**	UB	15**	VA	5**	WB
	1*	AP	50**	HB	70**	JB	7**	KB	0.1**	MB	2**	UD	50**	VB	10**	WA
	2*	AR	135**	HC	175**	JC	15**	KC	0.2	MC	5	UF	135	VC	20**	WC
	2.5*	AS	250	HD	350	JD	35	KD	0.5	MD	10	UA	250	VD	30**	WE
	5	AT	750	HE	700	JE	70	KE	1	ME	15	UC	750	VE	50**	WG
	10	AV	1500	HF	750	JF	100	KF	2	MF	20	UE	1500	VF	100	WI
	15	BJ			1000	JG	200	KG	3.5	NA	30	UG			120	WK
	25	BL			3500	JH	300	KH	5	MG	50	UI			150	WM
	30	BM			7000	JI	700	KJ	7	NB	60	UK			200	WP
	50	BN			10000	JK	1000	KL	10	MH	80	UM			300	WR
	75	BP					1500	KM	20	MI	100	UP			500	WS
	100	BR					1700	KN	30	MJ	200	UH				
	150	CJ					2000	KP	35	NC	300	UJ				
	200	CL					3000	KQ	50	MK	500	UL				
	250	CN					5000	KR	70	ND	1000	UN				
	300	CP					7000	KS	100	ML	0-32	US				
	400	CQ					10000	KT	135	NE	16-32	UQ				
	500	CR					15000	KU	350	NG	26-32	UR				
	600	CS					20000	KV	500	MM						
	750	CT					35000	KW	700	NH						
	1000	CV					50000	KY								
	1500	DJ					70000	KZ								
	2000	DL														
	2500	DM														
	3000	DN														
	5000	DR														
	6000	DS														
	7500	DT														
10000	DV															
<b>Barometric (Order code FPB)</b>											0-30	UG				
											16-32	UQ				
											26-32	UR				
<b>Vacuum (Order code FPV)</b>	1	AP	50	HB	35	JA	7	KB	0.035	MA	10	UA	15	VA	10	WA
	5	AT	135	HC	70	JB	15	KC	0.1	MB	20	UE	50	VB	20	WC
	10	AV	250	HD	175	JC	35	KD	0.2	MC	30	UG	135	VC	30	WE
	15	BJ	750	HE	350	JD	100	KF	0.5	MD			250	VD	50	WG
				700	JE			1	ME			750	VE	100	WI	
				750	JF											
				1000	JG											
<b>Differential (Order codes FDD, FDW)</b>	0.5	AN	15	HA	35	JA	2	KA	0.035	MA	1	UB	15	VA	5	WB
	1	AP	50	HB	70	JB	7	KB	0.1	MB	2	UD	50	VB	10	WA
	2	AR	135	HC	175	JC	15	KC	0.2	MC	5	UF	135	VC	20	WC
	2.5	AS	250	HD	350	JD	35	KD	0.5	MD	10	UA	250	VD	30	WE
	5	AT	750	HE	700	JE	70	KE	1	ME	15	UC	750	VE	50	WG
	10	AV	1500	HF	750	JF	100	KF	2	MF	20	UE	1500	VF	100	WI
	15	BJ			1000	JG	200	KG	3.5	NA	30	UG			120	WK
	25	BL			3500	JH	300	KH	5	MG	50	UI			150	WM
	30	BM			7000	JI	700	KJ	7	NB	60	UK			200	WP
	50	BN			10000	JK	1000	KL	10	MH	80	UM			300	WR
	75	BP					1500	KM	20	MI	100	UP			500	WS
	100	BR					1700	KN	30	MJ	200	UH				
	150	CJ					2000	KP	35	NC	300	UJ				
	200	CL					3000	KQ	50	MK	500	UL				
	250	CN					5000	KR	70	ND	1000	UN				
	300	CP					7000	KS			0-32	US				
	400	CQ					10000	KT			16-32	UQ				
	500	CR					15000	KU			26-32	UR				
	600	CS					20000	KV								
	750	CT					35000	KW								
1000	CV					50000	KY									

\* 0.5 psi to 2.5 psi ranges are not available for absolute pressure

\*\* Not available in absolute

# Model FP2000

## INTERNAL AMPLIFIERS

Amplifier specifications	Unamplified output: Option 2u	Voltage output: Option 2d	Voltage output: Option 2g	Current two-wire: Option 2p
Output signal	See accuracy table	0 Vdc to 5 Vdc	0 Vdc to 10 Vdc	4 mA to 20 mA
Input power (voltage)	10 Vdc	9 Vdc to 28 Vdc	15 Vdc to 28 Vdc	9 Vdc to 32 Vdc
Input power (current)	2 mA @ 10 Vdc	10 mA	15 mA	4 mA to 24 mA
Frequency response	Natural frequency	300 Hz	300 Hz	300 Hz
Power supply rejection	N/A	60 dB	60 dB	60 dB
Operating temperature	-40 °C to 116 °C [-40 °F to 240 °F]	-29 °C to 85 °C [-20 °F to 185 °F]	-29 °C to 85 °C [-20 °F to 185 °F]	-29 °C to 85 °C [-20 °F to 185 °F]
Reverse voltage protection	N/A	Yes	Yes	Yes
Short circuit protection	N/A	Momentary	Momentary	Yes

Amplifier specifications	Voltage output: Option 2e	Voltage output: Option 2f	Intrinsically safe amp: Option 2n (2N)***	Current two-wire: Option 2y
Output signal	0 Vdc to 5 Vdc	0 Vdc to 10 Vdc	4 mA to 20 mA	4 mA to 20 mA
Input power (voltage)	9 Vdc to 28 Vdc	15 Vdc to 28 Vdc	9 Vdc to 28 Vdc	9 Vdc to 32 Vdc
Input power (current)	10 mA	15 mA	4 mA to 24 mA	4 mA to 24 mA
Frequency response	2000 Hz	2000 Hz	2000 Hz	2000 Hz
Power supply rejection	60 dB	60 dB	60 dB	60 dB
Operating temperature	-29 °C to 85 °C [-20 °F to 185 °F]	-29 °C to 85 °C [-20 °F to 185 °F]	-29 °C to 85 °C [-20 °F to 185 °F]	-29 °C to 85 °C [-20 °F to 185 °F]
Reverse voltage protection	Yes	Yes	Yes	Yes
Short circuit protection	Momentary	Momentary	Yes	Yes

## ACCURACY


Non-amplified output @ 10 Vdc excitation	Gage and absolute	Vacuum	Barometric	Differential
0.10 % accuracy	50 mV <sup>4</sup>	25 mV	40 mV	50 mV <sup>4</sup>
0.25 % accuracy	100 mV	50 mV	80 mV	100 mV

## Configurable Pressure Transducer

### MOUNTING DIMENSIONS

#### Electrical termination

Code 6a: 6-pin, vented, Bendix style	Code 6m: 4-pin, vented, standard DIN (43650)	Code 6n: 4-pin, vented, mini DIN	Code 6q: 4-conductor, vented, integral cable, 1,52 m [5 ft]	Code 6r: 4-conductor, vented, integral cable, conduit fitting 1,52 m [5 ft]

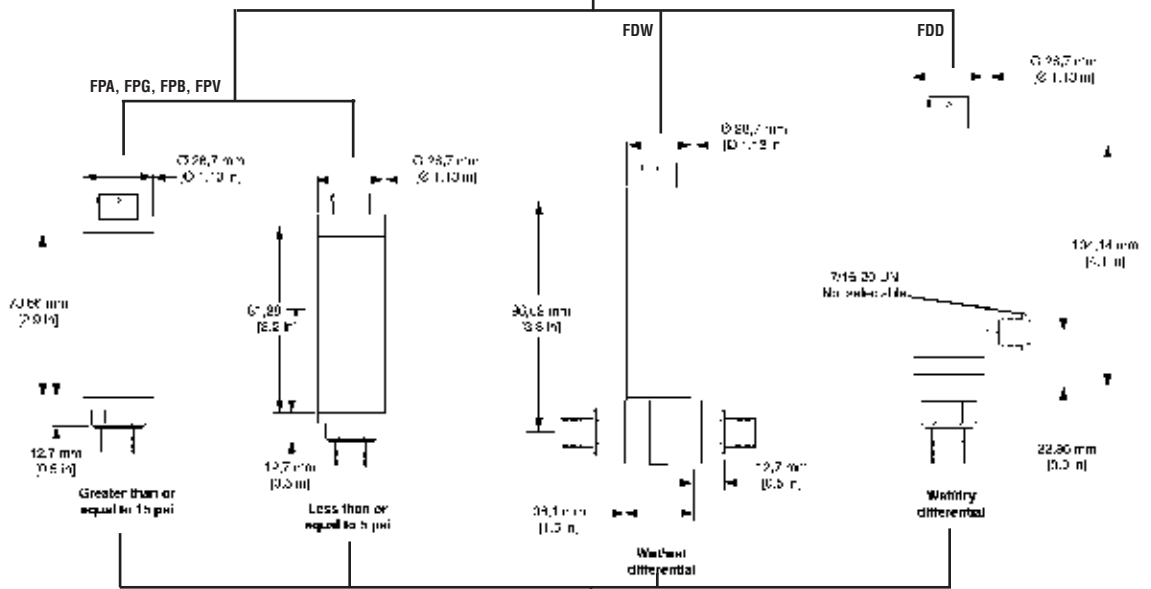

#### Pressure ports

	Code 5a 1/4-18 NPT female	Code 5b 1/4-18 NPT male	Code 5c 7/16-20 UNF female	Code 5d 7/16-20 UNF male	Code 5f G 1/4 B female	Code 5g G 1/4 B male
<b>Less than 1000 psi</b>						
<b>Greater than 1500 psi</b>						
	Code 5h 1/8-27 NPT female	Code 5i 1/8-27 NPT male	Code 5p M12-1.5 male	Code 5q M12-1.5 female	Code 5r 9/16-18 SAE male	Code 5s 9/16-18 SAE female
<b>Less than 1000 psi</b>						
<b>Greater than 1500 psi</b>						

# Model FP2000

## WIRING CODES

	Unamplified output: Option 2u	Voltage output: Option 2d/2e	Voltage output: Option 2g/2f	Current two-wire: Option 2p/2y	Intrinsically safe amp: Option 2n (2N)***
<b>Bendix PTIH-10-6P (Option 6a)</b>					
No shunt cal	A (+) Excitation B (+) Excitation C (-) Excitation D (-) Excitation E (-) Output F (+) Output	A (+) Supply B (-) Supply return C (-) Output 0 Vdc to 5 Vdc D (+) Output E No connection F No connection	A (+) Supply B (-) Supply return C (-) Output 0 Vdc to 10 Vdc D (+) Output Vdc E No connection F No connection	A (+) Supply B No connection C No connection D (-) Output 4 mA to 20 mA E No connection F No connection	A (+) Supply B No connection C No connection D (+) Output 4 mA to 20 mA E Case ground F No connection
With shunt cal (option 3d)	A (+) Excitation B (-) Excitation C (+) Output D (-) Output E No connection F Shunt Cal	A (+) Supply B (-) Supply return C (-) Output 0 Vdc to 5 Vdc D (+) Output E No connection F Shunt cal	A (+) Supply B (-) Supply return C (-) Output 0 Vdc to 10 Vdc D (+) Output E No connection F Shunt cal	A (+) Supply B No connection C No connection D (+) Output 4 mA to 20 mA E No connection F Shunt cal	A (+) Supply B No connection C No connection D (+) Output 4 mA to 20 mA E No connection F Shunt cal
<b>Std. DIN 43650 (Option 6m)</b>					
No shunt cal	1 (+) Excitation 2 (+) Output 3 (-) Output 4 (-) Excitation	1 (+) Supply 2 (+) Output 3 Supply/ output com. GND No connect. to case	1 (+) Supply 2 (+) Output 3 Supply/ output com. GND No connect. to case	1 (+) Supply 2 (+) Output 4 mA to 20 mA 3 No connection GND No connection	1 (+) Supply 2 (+) Output 3 Case ground GND No connection
With shunt cal (option 3d)	Not Applicable	1 (+) Supply 2 (+) Output 3 Supply/output com. GND Shunt cal	1 (+) Supply 2 (+) Output 3 Supply/output com. GND Shunt cal	1 (+) Supply 2 (+) Output 4 mA to 20 mA 3 No connection GND Shunt cal	1 (+) Supply 2 (+) Output 3 Case ground GND Shunt cal
<b>Mini DIN 40050 (Option 6n)</b>					
No shunt cal	1 (+) Excitation 2 (+) Output 3 (-) Output 4 (-) Excitation	1 (+) Supply 2 (+) Output 3 Supply/output com. GND No connect. to case	1 (+) Supply 2 (+) Output 3 Supply/output com. GND No connect. to case	1 (+) Supply 2 (+) Output 4 mA to 20 mA 3 No connection GND No connection to case	1 (+) Supply 2 (+) Output 3 Case ground GND No connection
With shunt cal (option 3d)	Not Applicable	1 (+) Supply 2 (+) Output 3 Supply/output com. GND Shunt cal	1 (+) Supply 2 (+) Output 3 Supply/output com. GND Shunt cal	1 (+) Supply 2 (+) Output 4 mA to 20 mA 3 No connection GND Shunt cal	1 (+) Supply 2 (+) Output 3 Case ground GND Shunt cal
<b>1.83 m [5 ft] integral cable (Option 6q)</b>					
No shunt cal	R (+) Excitation Bl (-) Excitation G (-) Output W (+) Output	R (+) Supply Bl (-) Supply return G (-) Output W (+) Output 0 Vdc to 5 Vdc	R (+) Supply Bl (-) Supply return G (-) Output W (+) Output 0 Vdc to 10 Vdc	R (+) Supply Bl (+) Output 4 mA to 20 mA	R (+) Supply Bl (+) Output 4 mA to 20 mA W Case ground
With shunt cal (option 3d)	Not Applicable	R (+) Supply Bl (-) Supply return G Shunt cal W (+) Output 0 Vdc to 5 Vdc	R (+) Supply Bl (-) Supply return G Shunt cal W (+) Output 0 Vdc to 10 Vdc	R (+) Supply Bl (+) Output 4 mA to 20 mA G Shunt cal	R (+) Supply Bl (+) Output 4 mA to 20 mA W Case ground G Shunt cal
<b>Conduit fitting (Option 6r)</b>					
No shunt cal	R (+) Excitation Bl (-) Excitation G (-) Output W (+) Output	R (+) Supply Bl (-) Supply return G (-) Output W (+) Output 0 Vdc to 5 Vdc	R (+) Supply Bl (-) Supply return G (-) Output W (+) Output 0 Vdc to 10 Vdc	R (+) Supply Bl (+) Output 4 mA to 20 mA	R (+) Supply Bl (+) Output 4 mA to 20 mA W Case ground
With shunt cal (option 3d)	Not Applicable	R (+) Supply Bl (-) Supply return G Shunt cal W (+) Output 0 Vdc to 5 Vdc	R (+) Supply Bl (-) Supply return G Shunt cal W (+) Output 0 Vdc to 10 Vdc	R (+) Supply Bl (+) Output 4 mA to 20 mA G Shunt cal	R (+) Supply Bl (+) Output 4 mA to 20 mA W Case ground G Shunt cal

Note: For wiring codes, R=red; Bl = black; W = white; G = green. Color specifies cable and letter or number specifies connection

\*\*\* See Honeywell's Web site (<http://measurementsensors.honeywell.com>) for most up-to-date information regarding Intrinsically Safe approvals ref. #008-0547-00.

## Configurable Pressure Transducer

### How to order

The **FP2000 Order Code** is an easy way for you to order exactly what you want the factory to build. Simply make one selection in each of the six required categories. Choose adders and accessories only if you require them. By visiting our Web site at [www.honeywell.com/sensing](http://www.honeywell.com/sensing) you can view complete technical specifications for the FP2000, or click to our on-line shopping site and actually place your order.

<p><b>Step 1</b></p> <p><b>Transducer type</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> Pressure - gage</td> <td style="border: none; text-align: right;">Type Code</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Pressure - absolute</td> <td style="border: none; text-align: right;">FPA</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Differential - wet/wet</td> <td style="border: none; text-align: right;">FDW</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Pressure - barometric</td> <td style="border: none; text-align: right;">FPB</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Differential - wet/dry</td> <td style="border: none; text-align: right;">FDD</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Pressure - vacuum</td> <td style="border: none; text-align: right;">FPV</td> </tr> </table> <p>Unit type</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> psi</td> <td style="border: none;"><input type="checkbox"/> bar</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> torr</td> <td style="border: none;"><input type="checkbox"/> in Hg</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> mBar</td> <td style="border: none;"><input type="checkbox"/> mm Hg</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> kPa</td> <td style="border: none;"><input type="checkbox"/> in H<sub>2</sub>O</td> </tr> </table>	<input type="checkbox"/> Pressure - gage	Type Code	<input type="checkbox"/> Pressure - absolute	FPA	<input type="checkbox"/> Differential - wet/wet	FDW	<input type="checkbox"/> Pressure - barometric	FPB	<input type="checkbox"/> Differential - wet/dry	FDD	<input type="checkbox"/> Pressure - vacuum	FPV	<input type="checkbox"/> psi	<input type="checkbox"/> bar	<input type="checkbox"/> torr	<input type="checkbox"/> in Hg	<input type="checkbox"/> mBar	<input type="checkbox"/> mm Hg	<input type="checkbox"/> kPa	<input type="checkbox"/> in H <sub>2</sub> O	<p><b>Step 2</b></p> <p><b>Pressure range</b> Gage, absolute, and differential</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: center;">Range code</td> <td style="border: none;"></td> <td style="border: none; text-align: center;">Range code</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 0.5 psi</td> <td style="border: none;">AN</td> <td style="border: none;"><input type="checkbox"/> 250 psi</td> <td style="border: none;">CN</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1 psi</td> <td style="border: none;">AP</td> <td style="border: none;"><input type="checkbox"/> 300 psi</td> <td style="border: none;">CP</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 2 psi</td> <td style="border: none;">AR</td> <td style="border: none;"><input type="checkbox"/> 400 psi</td> <td style="border: none;">CQ</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 2.5 psi</td> <td style="border: none;">AS</td> <td style="border: none;"><input type="checkbox"/> 500 psi</td> <td style="border: none;">CR</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 5 psi</td> <td style="border: none;">AT</td> <td style="border: none;"><input type="checkbox"/> 600 psi</td> <td style="border: none;">CS</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 10 psi</td> <td style="border: none;">AV</td> <td style="border: none;"><input type="checkbox"/> 750 psi</td> <td style="border: none;">CT</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 15 psi</td> <td style="border: none;">BJ</td> <td style="border: none;"><input type="checkbox"/> 1000 psi</td> <td style="border: none;">CV</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 25 psi</td> <td style="border: none;">BL</td> <td style="border: none;"><input type="checkbox"/> 1500 psi</td> <td style="border: none;">DJ</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 30 psi</td> <td style="border: none;">BM</td> <td style="border: none;"><input type="checkbox"/> 2000 psi</td> <td style="border: none;">DL</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 50 psi</td> <td style="border: none;">BN</td> <td style="border: none;"><input type="checkbox"/> 2500 psi</td> <td style="border: none;">DM</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 75 psi</td> <td style="border: none;">BP</td> <td style="border: none;"><input type="checkbox"/> 3000 psi</td> <td style="border: none;">DN</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 100 psi</td> <td style="border: none;">BR</td> <td style="border: none;"><input type="checkbox"/> 5000 psi</td> <td style="border: none;">DR</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 150 psi</td> <td style="border: none;">CJ</td> <td style="border: none;"><input type="checkbox"/> 6000 psi</td> <td style="border: none;">DS</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 200 psi</td> <td style="border: none;">CL</td> <td style="border: none;"><input type="checkbox"/> 7500 psi</td> <td style="border: none;">DT</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;"></td> <td style="border: none;"><input type="checkbox"/> 10000 psi</td> <td style="border: none;">DV</td> </tr> </table> <p>Barometric</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> 16-32 in Hga</td> <td style="border: none;">UQ</td> <td style="border: none;"><input type="checkbox"/> 1 psi</td> <td style="border: none;">AP</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 26-32 in Hga</td> <td style="border: none;">UR</td> <td style="border: none;"><input type="checkbox"/> 5 psi</td> <td style="border: none;">AT</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 0-30 in Hga</td> <td style="border: none;">UG</td> <td style="border: none;"><input type="checkbox"/> 10 psi</td> <td style="border: none;">AV</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none;"></td> <td style="border: none;"><input type="checkbox"/> 15 psi</td> <td style="border: none;">BJ</td> </tr> </table> <p>Vacuum</p> <p><b>Accuracy</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> 0.10 %</td> <td style="border: none; text-align: right;">Accuracy code</td> </tr> <tr> <td style="border: none;"></td> <td style="border: none; text-align: right;">1</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 0.25 %</td> <td style="border: none; text-align: right;">2</td> </tr> </table>		Range code		Range code	<input type="checkbox"/> 0.5 psi	AN	<input type="checkbox"/> 250 psi	CN	<input type="checkbox"/> 1 psi	AP	<input type="checkbox"/> 300 psi	CP	<input type="checkbox"/> 2 psi	AR	<input type="checkbox"/> 400 psi	CQ	<input type="checkbox"/> 2.5 psi	AS	<input type="checkbox"/> 500 psi	CR	<input type="checkbox"/> 5 psi	AT	<input type="checkbox"/> 600 psi	CS	<input type="checkbox"/> 10 psi	AV	<input type="checkbox"/> 750 psi	CT	<input type="checkbox"/> 15 psi	BJ	<input type="checkbox"/> 1000 psi	CV	<input type="checkbox"/> 25 psi	BL	<input type="checkbox"/> 1500 psi	DJ	<input type="checkbox"/> 30 psi	BM	<input type="checkbox"/> 2000 psi	DL	<input type="checkbox"/> 50 psi	BN	<input type="checkbox"/> 2500 psi	DM	<input type="checkbox"/> 75 psi	BP	<input type="checkbox"/> 3000 psi	DN	<input type="checkbox"/> 100 psi	BR	<input type="checkbox"/> 5000 psi	DR	<input type="checkbox"/> 150 psi	CJ	<input type="checkbox"/> 6000 psi	DS	<input type="checkbox"/> 200 psi	CL	<input type="checkbox"/> 7500 psi	DT			<input type="checkbox"/> 10000 psi	DV	<input type="checkbox"/> 16-32 in Hga	UQ	<input type="checkbox"/> 1 psi	AP	<input type="checkbox"/> 26-32 in Hga	UR	<input type="checkbox"/> 5 psi	AT	<input type="checkbox"/> 0-30 in Hga	UG	<input type="checkbox"/> 10 psi	AV			<input type="checkbox"/> 15 psi	BJ	<input type="checkbox"/> 0.10 %	Accuracy code		1	<input type="checkbox"/> 0.25 %	2	<p><b>Step 3</b></p> <p><b>Output</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: center;">Basic output code</td> <td style="border: none; text-align: center;">If adding 9d or 9f (&lt;5000 psi)</td> <td style="border: none; text-align: center;">If adding 1y, 3d, 9e or 14c</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> mV/V</td> <td style="border: none; text-align: center;">2u</td> <td style="border: none; text-align: center;">NA</td> <td style="border: none; text-align: center;">2u</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 5 Vdc</td> <td style="border: none; text-align: center;">2d</td> <td style="border: none; text-align: center;">NA</td> <td style="border: none; text-align: center;">2e</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 10 Vdc</td> <td style="border: none; text-align: center;">2g</td> <td style="border: none; text-align: center;">NA</td> <td style="border: none; text-align: center;">2f</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 4 mA to 20 mA</td> <td style="border: none; text-align: center;">2p</td> <td style="border: none; text-align: center;">2n(2N)</td> <td style="border: none; text-align: center;">2y</td> </tr> </table> <p>NOTE: If any ADDERS are required, the output code must be revised. See step 4.</p> <p><b>Pressure Port</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: right;">Port code</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1/4-18 NPT female</td> <td style="border: none; text-align: right;">5a</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1/4-18 NPT male</td> <td style="border: none; text-align: right;">5b</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 7/16-20 UNF female</td> <td style="border: none; text-align: right;">5c</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 7/16-20 UNF male</td> <td style="border: none; text-align: right;">5d</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> G 1/4 B female</td> <td style="border: none; text-align: right;">5f</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> G 1/4 B male</td> <td style="border: none; text-align: right;">5g</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1/8-27 NPT female</td> <td style="border: none; text-align: right;">5h</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1/8-27 NPT male</td> <td style="border: none; text-align: right;">5i</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> M12 x 1.5 male</td> <td style="border: none; text-align: right;">5p</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> M12 x 1.5 female</td> <td style="border: none; text-align: right;">5q</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 9/16-18 UNF SAE male</td> <td style="border: none; text-align: right;">5r</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 9/16-18 UNF SAE female</td> <td style="border: none; text-align: right;">5s</td> </tr> </table> <p><b>Electrical connector</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: right;">Connector code</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Bendix PTIH-10-6P</td> <td style="border: none; text-align: right;">6a</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> DIN 43650</td> <td style="border: none; text-align: right;">6m</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Mini DIN (40050)</td> <td style="border: none; text-align: right;">6n</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Integral polyurethane 5 ft cable</td> <td style="border: none; text-align: right;">6q</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 1/2 x 14 NPT conduit 5 ft cable exit</td> <td style="border: none; text-align: right;">6r</td> </tr> </table>		Basic output code	If adding 9d or 9f (<5000 psi)	If adding 1y, 3d, 9e or 14c	<input type="checkbox"/> mV/V	2u	NA	2u	<input type="checkbox"/> 5 Vdc	2d	NA	2e	<input type="checkbox"/> 10 Vdc	2g	NA	2f	<input type="checkbox"/> 4 mA to 20 mA	2p	2n(2N)	2y		Port code	<input type="checkbox"/> 1/4-18 NPT female	5a	<input type="checkbox"/> 1/4-18 NPT male	5b	<input type="checkbox"/> 7/16-20 UNF female	5c	<input type="checkbox"/> 7/16-20 UNF male	5d	<input type="checkbox"/> G 1/4 B female	5f	<input type="checkbox"/> G 1/4 B male	5g	<input type="checkbox"/> 1/8-27 NPT female	5h	<input type="checkbox"/> 1/8-27 NPT male	5i	<input type="checkbox"/> M12 x 1.5 male	5p	<input type="checkbox"/> M12 x 1.5 female	5q	<input type="checkbox"/> 9/16-18 UNF SAE male	5r	<input type="checkbox"/> 9/16-18 UNF SAE female	5s		Connector code	<input type="checkbox"/> Bendix PTIH-10-6P	6a	<input type="checkbox"/> DIN 43650	6m	<input type="checkbox"/> Mini DIN (40050)	6n	<input type="checkbox"/> Integral polyurethane 5 ft cable	6q	<input type="checkbox"/> 1/2 x 14 NPT conduit 5 ft cable exit	6r
<input type="checkbox"/> Pressure - gage	Type Code																																																																																																																																																																					
<input type="checkbox"/> Pressure - absolute	FPA																																																																																																																																																																					
<input type="checkbox"/> Differential - wet/wet	FDW																																																																																																																																																																					
<input type="checkbox"/> Pressure - barometric	FPB																																																																																																																																																																					
<input type="checkbox"/> Differential - wet/dry	FDD																																																																																																																																																																					
<input type="checkbox"/> Pressure - vacuum	FPV																																																																																																																																																																					
<input type="checkbox"/> psi	<input type="checkbox"/> bar																																																																																																																																																																					
<input type="checkbox"/> torr	<input type="checkbox"/> in Hg																																																																																																																																																																					
<input type="checkbox"/> mBar	<input type="checkbox"/> mm Hg																																																																																																																																																																					
<input type="checkbox"/> kPa	<input type="checkbox"/> in H <sub>2</sub> O																																																																																																																																																																					
	Range code		Range code																																																																																																																																																																			
<input type="checkbox"/> 0.5 psi	AN	<input type="checkbox"/> 250 psi	CN																																																																																																																																																																			
<input type="checkbox"/> 1 psi	AP	<input type="checkbox"/> 300 psi	CP																																																																																																																																																																			
<input type="checkbox"/> 2 psi	AR	<input type="checkbox"/> 400 psi	CQ																																																																																																																																																																			
<input type="checkbox"/> 2.5 psi	AS	<input type="checkbox"/> 500 psi	CR																																																																																																																																																																			
<input type="checkbox"/> 5 psi	AT	<input type="checkbox"/> 600 psi	CS																																																																																																																																																																			
<input type="checkbox"/> 10 psi	AV	<input type="checkbox"/> 750 psi	CT																																																																																																																																																																			
<input type="checkbox"/> 15 psi	BJ	<input type="checkbox"/> 1000 psi	CV																																																																																																																																																																			
<input type="checkbox"/> 25 psi	BL	<input type="checkbox"/> 1500 psi	DJ																																																																																																																																																																			
<input type="checkbox"/> 30 psi	BM	<input type="checkbox"/> 2000 psi	DL																																																																																																																																																																			
<input type="checkbox"/> 50 psi	BN	<input type="checkbox"/> 2500 psi	DM																																																																																																																																																																			
<input type="checkbox"/> 75 psi	BP	<input type="checkbox"/> 3000 psi	DN																																																																																																																																																																			
<input type="checkbox"/> 100 psi	BR	<input type="checkbox"/> 5000 psi	DR																																																																																																																																																																			
<input type="checkbox"/> 150 psi	CJ	<input type="checkbox"/> 6000 psi	DS																																																																																																																																																																			
<input type="checkbox"/> 200 psi	CL	<input type="checkbox"/> 7500 psi	DT																																																																																																																																																																			
		<input type="checkbox"/> 10000 psi	DV																																																																																																																																																																			
<input type="checkbox"/> 16-32 in Hga	UQ	<input type="checkbox"/> 1 psi	AP																																																																																																																																																																			
<input type="checkbox"/> 26-32 in Hga	UR	<input type="checkbox"/> 5 psi	AT																																																																																																																																																																			
<input type="checkbox"/> 0-30 in Hga	UG	<input type="checkbox"/> 10 psi	AV																																																																																																																																																																			
		<input type="checkbox"/> 15 psi	BJ																																																																																																																																																																			
<input type="checkbox"/> 0.10 %	Accuracy code																																																																																																																																																																					
	1																																																																																																																																																																					
<input type="checkbox"/> 0.25 %	2																																																																																																																																																																					
	Basic output code	If adding 9d or 9f (<5000 psi)	If adding 1y, 3d, 9e or 14c																																																																																																																																																																			
<input type="checkbox"/> mV/V	2u	NA	2u																																																																																																																																																																			
<input type="checkbox"/> 5 Vdc	2d	NA	2e																																																																																																																																																																			
<input type="checkbox"/> 10 Vdc	2g	NA	2f																																																																																																																																																																			
<input type="checkbox"/> 4 mA to 20 mA	2p	2n(2N)	2y																																																																																																																																																																			
	Port code																																																																																																																																																																					
<input type="checkbox"/> 1/4-18 NPT female	5a																																																																																																																																																																					
<input type="checkbox"/> 1/4-18 NPT male	5b																																																																																																																																																																					
<input type="checkbox"/> 7/16-20 UNF female	5c																																																																																																																																																																					
<input type="checkbox"/> 7/16-20 UNF male	5d																																																																																																																																																																					
<input type="checkbox"/> G 1/4 B female	5f																																																																																																																																																																					
<input type="checkbox"/> G 1/4 B male	5g																																																																																																																																																																					
<input type="checkbox"/> 1/8-27 NPT female	5h																																																																																																																																																																					
<input type="checkbox"/> 1/8-27 NPT male	5i																																																																																																																																																																					
<input type="checkbox"/> M12 x 1.5 male	5p																																																																																																																																																																					
<input type="checkbox"/> M12 x 1.5 female	5q																																																																																																																																																																					
<input type="checkbox"/> 9/16-18 UNF SAE male	5r																																																																																																																																																																					
<input type="checkbox"/> 9/16-18 UNF SAE female	5s																																																																																																																																																																					
	Connector code																																																																																																																																																																					
<input type="checkbox"/> Bendix PTIH-10-6P	6a																																																																																																																																																																					
<input type="checkbox"/> DIN 43650	6m																																																																																																																																																																					
<input type="checkbox"/> Mini DIN (40050)	6n																																																																																																																																																																					
<input type="checkbox"/> Integral polyurethane 5 ft cable	6q																																																																																																																																																																					
<input type="checkbox"/> 1/2 x 14 NPT conduit 5 ft cable exit	6r																																																																																																																																																																					
<p><b>Step 4</b></p> <p><b>Adders</b></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> Enhanced thermals</td> <td style="border: none; text-align: right;">Adder code</td> </tr> <tr> <td style="border: none;">Gage: 0 °F to 180 °F</td> <td style="border: none; text-align: right;">1y</td> </tr> <tr> <td style="border: none;">Absolute: 0 °F to 180 °F</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none;">Differential: 0 °F to 180 °F</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none;">Barometric: 30 °F to 170 °F</td> <td style="border: none;"></td> </tr> <tr> <td style="border: none;">Vacuum: 10 °F to 170 °F</td> <td style="border: none;"></td> </tr> </table> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> Shunt cal</td> <td style="border: none; text-align: right;">3d</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> IS rating</td> <td style="border: none; text-align: right;">9d</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> CE rating</td> <td style="border: none; text-align: right;">9e</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> IS and CE rating</td> <td style="border: none; text-align: right;">9f</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Zero and span adjustments</td> <td style="border: none; text-align: right;">14c</td> </tr> </table> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><input type="checkbox"/> mV/V</td> <td style="border: none; text-align: right;">2u</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 5 Vdc</td> <td style="border: none; text-align: right;">2e</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 10 Vdc</td> <td style="border: none; text-align: right;">2f</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 4 mA to 20 mA (CE only)</td> <td style="border: none; text-align: right;">2y</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 4 mA to 20 mA (IS only)</td> <td style="border: none; text-align: right;">2n (2N)</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 4 mA to 20 mA (IS and CE)</td> <td style="border: none; text-align: right;">2n (2N)</td> </tr> </table> <p>NOTE: If you choose any adder output from step 4, you must revise your output code selection using this output code chart. IS outputs available only on ranges up to 5000 psi.</p> <p><b>Accessories</b></p> <p>Mating connectors only</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: right;">Acc. code</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Mini DIN</td> <td style="border: none; text-align: right;">AA161</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> Bendix</td> <td style="border: none; text-align: right;">AA111</td> </tr> </table> <p>Mating conn. with 15 ft. cable for Bendix connector (6A)</p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"></td> <td style="border: none; text-align: center;">Without shunt</td> <td style="border: none; text-align: center;">With shunt (3d)</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> mV/V</td> <td style="border: none; text-align: center;">AA113</td> <td style="border: none; text-align: center;">AA513</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 4 mA to 20 mA</td> <td style="border: none; text-align: center;">AA116</td> <td style="border: none; text-align: center;">AA516</td> </tr> <tr> <td style="border: none;"><input type="checkbox"/> 0 to 5/0 to 10 Vdc</td> <td style="border: none; text-align: center;">AA117</td> <td style="border: none; text-align: center;">AA517</td> </tr> </table>	<input type="checkbox"/> Enhanced thermals	Adder code	Gage: 0 °F to 180 °F	1y	Absolute: 0 °F to 180 °F		Differential: 0 °F to 180 °F		Barometric: 30 °F to 170 °F		Vacuum: 10 °F to 170 °F		<input type="checkbox"/> Shunt cal	3d	<input type="checkbox"/> IS rating	9d	<input type="checkbox"/> CE rating	9e	<input type="checkbox"/> IS and CE rating	9f	<input type="checkbox"/> Zero and span adjustments	14c	<input type="checkbox"/> mV/V	2u	<input type="checkbox"/> 5 Vdc	2e	<input type="checkbox"/> 10 Vdc	2f	<input type="checkbox"/> 4 mA to 20 mA (CE only)	2y	<input type="checkbox"/> 4 mA to 20 mA (IS only)	2n (2N)	<input type="checkbox"/> 4 mA to 20 mA (IS and CE)	2n (2N)		Acc. code	<input type="checkbox"/> Mini DIN	AA161	<input type="checkbox"/> Bendix	AA111		Without shunt	With shunt (3d)	<input type="checkbox"/> mV/V	AA113	AA513	<input type="checkbox"/> 4 mA to 20 mA	AA116	AA516	<input type="checkbox"/> 0 to 5/0 to 10 Vdc	AA117	AA517	<p><b>Step 5</b></p> <p><b>Example order code</b> <span style="float: right;"><b>FDW 1 CN 2y 5b 6a 1y AA116</b></span></p> <table style="width: 100%; border: none;"> <tr> <td style="border: none;"><b>Selection</b></td> <td style="border: none;"><b>Description</b></td> <td style="border: none;"><b>Code</b></td> </tr> <tr> <td style="border: none;">Transducer type</td> <td style="border: none;">Differential wet/wet</td> <td style="border: none;">FDW</td> </tr> <tr> <td style="border: none;">Accuracy</td> <td style="border: none;">0.10 %</td> <td style="border: none;">1</td> </tr> <tr> <td style="border: none;">Pressure range</td> <td style="border: none;">250 psi</td> <td style="border: none;">CN</td> </tr> <tr> <td style="border: none;">Output</td> <td style="border: none;">4 mA to 20 mA</td> <td style="border: none;">2y</td> </tr> <tr> <td style="border: none;">Pressure port</td> <td style="border: none;">1/4-18 NPT male</td> <td style="border: none;">5b</td> </tr> <tr> <td style="border: none;">Electrical output connections</td> <td style="border: none;">Bendix PTIH-10-6P</td> <td style="border: none;">6a</td> </tr> <tr> <td style="border: none;">Adders</td> <td style="border: none;">Enhanced temperature range</td> <td style="border: none;">1y</td> </tr> <tr> <td style="border: none;">Accessories</td> <td style="border: none;">Mating connector with cable</td> <td style="border: none;">AA116</td> </tr> </table> <p>There must be a code in each of the six basic code boxes. If there are no adders or accessories chosen, leave the boxes blank.</p>	<b>Selection</b>	<b>Description</b>	<b>Code</b>	Transducer type	Differential wet/wet	FDW	Accuracy	0.10 %	1	Pressure range	250 psi	CN	Output	4 mA to 20 mA	2y	Pressure port	1/4-18 NPT male	5b	Electrical output connections	Bendix PTIH-10-6P	6a	Adders	Enhanced temperature range	1y	Accessories	Mating connector with cable	AA116																																																																																						
<input type="checkbox"/> Enhanced thermals	Adder code																																																																																																																																																																					
Gage: 0 °F to 180 °F	1y																																																																																																																																																																					
Absolute: 0 °F to 180 °F																																																																																																																																																																						
Differential: 0 °F to 180 °F																																																																																																																																																																						
Barometric: 30 °F to 170 °F																																																																																																																																																																						
Vacuum: 10 °F to 170 °F																																																																																																																																																																						
<input type="checkbox"/> Shunt cal	3d																																																																																																																																																																					
<input type="checkbox"/> IS rating	9d																																																																																																																																																																					
<input type="checkbox"/> CE rating	9e																																																																																																																																																																					
<input type="checkbox"/> IS and CE rating	9f																																																																																																																																																																					
<input type="checkbox"/> Zero and span adjustments	14c																																																																																																																																																																					
<input type="checkbox"/> mV/V	2u																																																																																																																																																																					
<input type="checkbox"/> 5 Vdc	2e																																																																																																																																																																					
<input type="checkbox"/> 10 Vdc	2f																																																																																																																																																																					
<input type="checkbox"/> 4 mA to 20 mA (CE only)	2y																																																																																																																																																																					
<input type="checkbox"/> 4 mA to 20 mA (IS only)	2n (2N)																																																																																																																																																																					
<input type="checkbox"/> 4 mA to 20 mA (IS and CE)	2n (2N)																																																																																																																																																																					
	Acc. code																																																																																																																																																																					
<input type="checkbox"/> Mini DIN	AA161																																																																																																																																																																					
<input type="checkbox"/> Bendix	AA111																																																																																																																																																																					
	Without shunt	With shunt (3d)																																																																																																																																																																				
<input type="checkbox"/> mV/V	AA113	AA513																																																																																																																																																																				
<input type="checkbox"/> 4 mA to 20 mA	AA116	AA516																																																																																																																																																																				
<input type="checkbox"/> 0 to 5/0 to 10 Vdc	AA117	AA517																																																																																																																																																																				
<b>Selection</b>	<b>Description</b>	<b>Code</b>																																																																																																																																																																				
Transducer type	Differential wet/wet	FDW																																																																																																																																																																				
Accuracy	0.10 %	1																																																																																																																																																																				
Pressure range	250 psi	CN																																																																																																																																																																				
Output	4 mA to 20 mA	2y																																																																																																																																																																				
Pressure port	1/4-18 NPT male	5b																																																																																																																																																																				
Electrical output connections	Bendix PTIH-10-6P	6a																																																																																																																																																																				
Adders	Enhanced temperature range	1y																																																																																																																																																																				
Accessories	Mating connector with cable	AA116																																																																																																																																																																				
Order code																																																																																																																																																																						
Accessory code																																																																																																																																																																						

Zero and span adjustments are located on the side. See drawing for details. No zero and span adjustments are available on mV/V output option.

# Model FP2000

# Configurable Pressure Transducer

## NOTES

1. Accuracies stated are expected for best-fit straight line for all errors, including linearity, hysteresis, and non-repeatability through zero.
2. For low pressure ranges, temperature effects may vary.
3. The wet/wet differential pressure transducer has two separate, welded Hastelloy diaphragms. In wet/dry unit, the wet port (high port) has all-welded stainless steel and Hastelloy construction. The dry port (low port) has no isolation diaphragm.
4. For low gage and differential pressure ranges at 0.10 % accuracy, non-amplified output @ 10 Vdc excitation = 100 mV.
5. Range up to and include 5000 psi.
6. Not available with 6m.

## Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office.

To learn more about Honeywell's test and measurement products, call **+1-614-850-5000**, visit

**<http://measurementsensors.honeywell.com>**,

or e-mail inquiries to **[info.tm@honeywell.com](mailto:info.tm@honeywell.com)**

Sensing and Control  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
**[honeywell.com](http://honeywell.com)**

**Warranty.** Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## WARNING

### PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

## WARNING

### MISUSE OF DOCUMENTATION

- The information presented in this datasheet is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

# Honeywell

008835-4-EN IL50 GLO  
June 2014

Copyright © 2014 Honeywell International Inc. All rights reserved.