

Model QFFH-9

Flange Reaction Torque Transducer



DESCRIPTION

Model QFFH-9 flange reaction torque transducer is designed for installation between test pieces such as motors, switches, axles or shafts and their mounting plate. These models operate and are calibrated in both directions. Stainless steel construction enhances durability in harsh, industrial environments. These mod-

els have no moving parts and utilize four bonded strain gages on a special machined portion of the transducer to achieve a maximum non-linearity of 0.1% over a wide dynamic range. Typical applications include tire braking, motor dynamometers, friction-skid testing, and twist measurement.

FEATURES

- 3000 in-lb to 24000 in-lb capacities
- 0.1 % non-linearity and hysteresis
- Wide dynamic range
- High frequency response
- Stainless steel construction

Model QFFH-9

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Range	3000; 6000; 12000; 24000 in.-lb
System accuracy	±0.1 % full scale
Linearity	±0.1 % full scale
Hysteresis	±0.1 % full scale
Non-repeatability	±0.03 % full scale
Output	2 mV/V nominal
Resolution	Infinite

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-54 °C to 107 °C [-65 °F to 225 °F]
Temperature, compensated	16 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.005 % full scale/ °F
Temperature effect, span	0.005 % reading/ °F

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strain gage type	Bonded foil
Excitation	10 Vdc
Bridge resistance	350 ohm
Electrical termination	Bendix PTIH-10-6P or equivalent
Mating connector	PT06A-10-6S or equivalent (not included)

RANGE CODES

Range Code	Available ranges
TR	3000 in-lb
TT	6000 in-lb
TV	12000 in-lb
TW	24000 in-lb

OPTION CODES

Range Code	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.
Torque range	3000, 6000, 1200, 24000 in-lb
Temperature compensation	1a. 16 °C to 71 °C [60 °F to 160 °F] 1b. -1 °C to 54 °C [30 °F to 130 °F] 1c. -18 °C to 85 °C [0 °F to 185 °F] 1d. -29 °C to 54 °C [-20 °F to 130 °F] 1e. -29 °C to 93 °C [-20 °F to 200 °F] 1f. 21 °C to 121 °C [70 °F to 250 °F]
Internal amplifiers	2u. Unamplified, mV/V output
Electrical termination	6a. Bendix PTIH-10-6P - 6-pin (max. 121 °C [250 °F]) 6b. MS connector MS3102E-14S-6P (mates with MS3106E-14S-6S, max 160 °F) 6e. Integral cable: Teflon 6f. Integral cable: PVC 6g. Integral cable: Neoprene 6h. Integral cable: Silicone
Interfaces	53e. Signature calibration 53t. T.E.D.S. IEEE 1451.4 module


Flange Type Reaction Torque Transducer

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Static overload capacity	50 % over capacity
Case material	Stainless steel


MOUNTING DIMENSIONS

Range (in-lb)	ØD1 mm [in]	W mm [in]	A mm [in]	C mm [in] dia. B.C.	E mm [in] dia. Thru
3000, 6000	101,6 mm [4.00 in]	76,2 mm [3.00 in]	12,7 mm [0.50 in]	82,55 mm [3.25 in]	8,38 mm [0.33 in]
12000, 24000	127 mm [5.00 in]	88,9 mm [3.50 in]	19,05 mm [0.75 in]	107,95 mm [4.25 in]	9,9 mm [0.39 in]

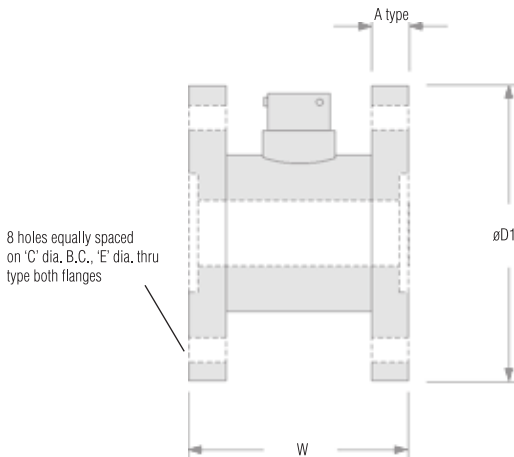

For reference only

TYPICAL SYSTEM DIAGRAM

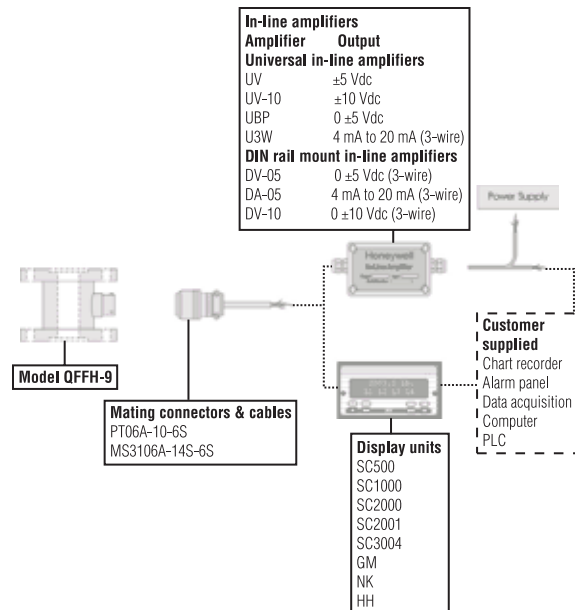

Model QFFH-9

Flange Type Reaction Torque Transducer

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

For more information about Sensing and Control products, visit www.honeywell.com/sensing or call +1-815-235-6847

Email inquiries to info.sc@honeywell.com

 **WARNING**
PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

 **WARNING**
MISUSE OF DOCUMENTATION

- The information presented in this catalogue is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Sensing and Control
Automation and Control Solutions
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422 USA
+1-815-235-6847
www.honeywell.com/sensing

008804-1-EN IL50 GLO
June 2008
Copyright © 2008 Honeywell International Inc. All rights reserved.

Honeywell