

Model RM

Rod End In-line Tension Load Cell



DESCRIPTION

Model RM, with male threads, is a high output rod end load cell designed to be mounted inline to the load axis to measure tension. The outputs for these load cells are ± 5 Vdc or 10 Vdc, or 4 mA to 20 mA (two wire) all calibrated in tension. The mounting thread configurations and the all welded stainless steel construction make these tension load cells ideal for a variety of rugged field applications as well as in the laboratory.

The optional high output signal offers resistance to electrical noise as well as additional signal resolution. Additional options include an internal buffered shunt calibration circuit for ease of setup with an associated indicator, and a variety of thread selections, including metric sizes.

FEATURES

- 2000 lb to 200000 lb range
- Male/male threads
- Stainless steel, all-welded construction
- 0 Vdc to 5 Vdc or 4 mA to 20 mA outputs
- Up to 0.15 % linearity
- CE approved¹⁰

Model RM

PERFORMANCE SPECIFICATIONS

Characteristic	Measure
Load ranges ¹¹	2000 lb to 200000 lb ¹
Linearity 100 lb to 1000 lb	±0.2 % full scale
Linearity 2000 lb to 50000 lb	±0.15 % full scale
Linearity 75000 lb to 20000 lb	±0.2 % full scale
Hysteresis 100 lb to 1000 lb	±0.2 % full scale
Hysteresis 2000 lb to 50000 lb	±0.15 % full scale
Hysteresis 75000 lb to 20000 lb	±0.2 % full scale
Non-repeatability	± 0.05 % full scale
Output (tolerance)	2 mV/V
Operation	Tension
Resolution	Infinite

ENVIRONMENTAL SPECIFICATIONS

Characteristic	Measure
Temperature, operating	-54 °C to 121 °C [-65 °F to 250 °F]
Temperature, compensated	15 °C to 71 °C [60 °F to 160 °F]
Temperature effect, zero	0.005 % full scale/°F
Temperature effect, span	0.005 % full scale/°F

ELECTRICAL SPECIFICATIONS

Characteristic	Measure
Strain gage type	Bonded foil
Excitation (calibration)	10 Vdc
Excitation (acceptable)	Up to 15 Vdc or Vac
Insulation resistance	5000 mOhm @ 50 Vdc
Bridge resistance (tolerance)	350 ohm
Zero balance (tolerance)	±1% full scale
Shunt calibration data	Included
Electrical termination (std) 2000 lb to 50000 lb	PTIH-10-6P or equivalent (hermetic stainless)
Electrical termination (std) 75000 lb to 200000 lb	MS3102E-14S-6P or equivalent
Mating connector (not included) 2000 lb to 50000 lb	PT06A-10-6S or equivalent (AA111)
Mating connector (not included) 75000 lb to 200000 lb	MS3106A-14S-6S or equivalent (AA121)

MECHANICAL SPECIFICATIONS

Characteristic	Measure
Maximum allowable load	150 % FS ¹
Weight	See table
Material	Stainless steel
Deflection full scale	See table
Natural frequency	See table

RANGE CODES

Range Code	Available ranges	Range Code	Available ranges
DL	2000 lb	EL	20000 lb
DN	3000 lb	EN	30000 lb
DP	4000 lb	EP	50000 lb
DR	5000 lb	ER	75000 lb
DT	75000 lb	ET	100000 lb
DV	10000 lb	FJ	150000 lb
EJ	15000 lb	FL	200000 lb

WIRING CODES

Connector	Unamplified (Std.)
A	(+) excitation
B	(+) excitation
C	(-) excitation
D	(-) excitation
E	(-) output
F	(+) output

DEFLECTIONS AND RINGING FREQUENCIES

Capacity (lb)	Deflection at full scale mm [in]	Ringling frequency (Hz)	Weight kg [lb]
2000	0,076 [0.003]	5000	0,45 [1.0]
3000	0,076 [0.003]	5000	0,45 [1.0]
4000	0,076 [0.003]	5100	0,45 [1.0]
5000	0,076 [0.003]	5200	0,45 [1.0]
7500	0,102 [0.004]	7500	0,68 [1.5]
10000	0,102 [0.004]	7600	0,68 [1.5]
15000	0,127 [0.005]	8000	0,68 [1.5]
20000	0,127 [0.005]	9800	0,68 [1.5]
30000	0,127 [0.005]	8000	1,90 [4.2]
50000	0,127 [0.005]	8200	1,90 [4.2]
75000 to 100000	0,152 [0.006]	5000	7,34 [16.5]
150000 to 200000	0,178 [0.007]	4200	16,01 [35.3]

Rod End In-Line Tension Load Cell

INTERNAL AMPLIFIERS

Amplifier specifications	Voltage output: Option 2b	Voltage output: Option 2c	Voltage output: Option 2t	Current three-wire: Option 2j	Current two-wire: Option 2k	Intrinsically safe amp: Option 2n (2N)***
Output signal	±5 V	0 V to 5 V or ±5 V @ 45 mA	0 V to 10 V or ±10 V @ 45 mA	4 mA to 20 mA	4 mA to 20 mA	4 mA to 20 mA
Input power (voltage)	±15 V or 26 Vdc to 32 Vdc	18 Vdc to 28 Vdc	15 Vdc to 28 Vdc	22 Vdc to 32 Vdc	15 Vdc to 40 Vdc	9 Vdc to 28 Vdc
Input power (current)	45 mA	40 mA	40 mA	65 mA	4 mA to 28 mA	4 mA to 24 mA
Freq. resp (amp)	3000 Hz	3000 Hz	3000 Hz	2500 Hz	300 Hz	2000 Hz
Power supply rej.	60 db	60 db	60 db	60 db	60 db	60 db
Operating temp.	-20 °F to 185 °F	-20 °F to 185 °F	-20 °F to 185 °F	0 °F to 185 °F	0 °F to 185 °F	-20 °F to 185 °F
Reverse voltage protection	Yes	Yes	Yes	Yes	Yes	Yes
Short cir. protection	Momentary	Momentary	Momentary	Yes	Yes	Yes
Wiring code: connector (std)⁵	A (+) Supply B Output common C Supply return D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return ** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B Output common** C Supply return** D (+) Output E Shunt cal 1 F Shunt cal 2	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection	A (+) Supply B No connection C No connection D (+) Output E Case ground F No connection
Wiring code: cable^{5,6,7}	R (+) Supply Bl Output common G Supply return W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply Bl Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply Bl Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply Bl Output common* G Supply return* W (+) Output B Shunt cal 1 Br Shunt cal 2	R (+) Supply Bl (+) Output W Case ground	R (+) Supply Bl (+) Output W Case ground

* Black and green wires are internally connected.

** Pins B and C are internally connected.

*** See our Web site for the most up-to-date information regarding intrinsically safe approvals, ref. #008-0547-00.

Model RM

OPTION CODES


	Many range/option combinations are available in our quick-ship and fast-track manufacture programs. Please see http://sensing.honeywell.com/TMsensor-ship for updated listings.	
Load ranges	2K, 3K, 4K, 5K, 7.5K, 10K, 15K, 20K, 30K, 50K, 75K, 100K, 150K, 200K	
Temperature compensation	1a. 60 °F to 160 °F 1b. 30 °F to 130 °F 1c. 0 °F to 185 °F 1d. -20 °F to 130 °F 1e. -20 °F to 200 °F 1f. 70 °F to 250 °F	1g. 70 °F to 325 °F ⁸ 1h. 70 °F to 400 °F ⁸ 1i. -65 °F to 250 °F ⁸ 1j. 0 °C to 50 °C 1k. -20 °C to 85 °C 1m. -25 °C to 110 °C
Internal amplifiers	2u. Unamplified, mV/V output 2b. 4 wire, ±5 Vdc output 2c. 0 Vdc to 5 Vdc 2j. 4 mA to 20 mA (three-wire) output	2k. 4 mA to 20 mA (two-wire) ¹² 2n (2N) 4 mA to 20 mA (two-wire) intrinsically safe ¹² 2t. 0 Vdc to 10 Vdc output
Internal amp enhancements	3a. Input/output isolation ⁷ 3d. Remote buffered shunt calibration	
Electrical termination	6a. Bendix PTIH-10-6P (or equivalent) 6-pin, (max. 250 °F) (ranges 50000 lb and below) 6b. MS connector MS3102E-14S-6P (mates with MS3106E-14S-6), (max. 160 °F) (ranges above 50000 lb) ⁶ 6e. Integral cable: Teflon 6f. Integral cable: PVC	6g. Integral cable: Neoprene 6h. Integral cable: Silicone 6i. Integral underwater cable 6j. 1/2-14 conduit fitting with 5 ft of 4 conductor PVC cable 6q. Integral cable: Polyurethane 6v. Phoenix connector on end of cable
Shunt calibration	8a. Precision internal resistor ⁸	
Bridge type	11a. Square bridge ⁸ 11b. Symmetrical bridge ⁸ 11c. Square and symmetrical bridge ⁸ 31a. Dual bridge	
Bridge resistance	12b. 5000 ohm (foil) (max. 250 °F)	
Zero and span adjustment	14a. No access to zero and span adjustment	
Electrical connector orientation	15a. Horizontal electrical exit port orientation 15b. Vertical electrical exit port orientation 15c. Radial electrical exit port orientation 15d. Connector on end of cable	
Shock and vibration	44a. Shock and vibration resistance	
Interfaces	53e. Signature calibration ⁹ 53t. TEDS IEEE 1451.4 module ⁹	

Rod End In-Line Tension Load Cell

MOUNTING DIMENSIONS

Order code (Unamp/Amp)	D mm [in]	L1 mm [in]	Unamplified only			Amplified only	
			A mm [in]	B mm [in]	L2 mm [in]	E mm [in]	F mm [in]
AL413/AL613	38,1 [1.50]	66,4 [2.60]	19,05 [0.75]	20,82 [0.82]	see below	49,53 [1.95]	38,1 [1.50]
AL415/AL615	44,45 [1.75]	66,4 [2.60]	19,05 [0.75]	20,82 [0.82]	see below	49,53 [1.95]	38,1 [1.50]
AL417/AL617	63,5 [2.50]	77,47 [3.05]	19,05 [0.75]	20,82 [0.82]	see below	49,53 [1.95]	38,1 [1.50]


Unamplified

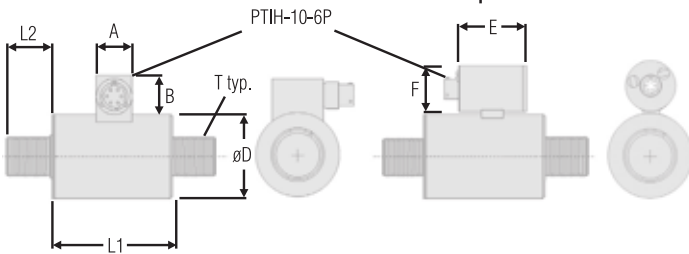

THREAD SIZES AND OPTION CODES

	13a	13b	13c	13d	13e
Range (lb)	1/2-20 UNF	3/4-16 UNF	7/8-14 UNF	1-14 UNF	1 1/2-12 UNF
2000 to 5000	AL413	AL413	AL413		
7500 to 15000		AL415	AL415	AL415	AL417
20000			AL415	AL415	AL417
30000 to 50000					AL417
L2 mm [in]	24,13 [0.95]	24,13 [0.95]	24,13 [0.95]	31,75 [1.25]	38,1 [1.50]

TYPICAL SYSTEM DIAGRAM

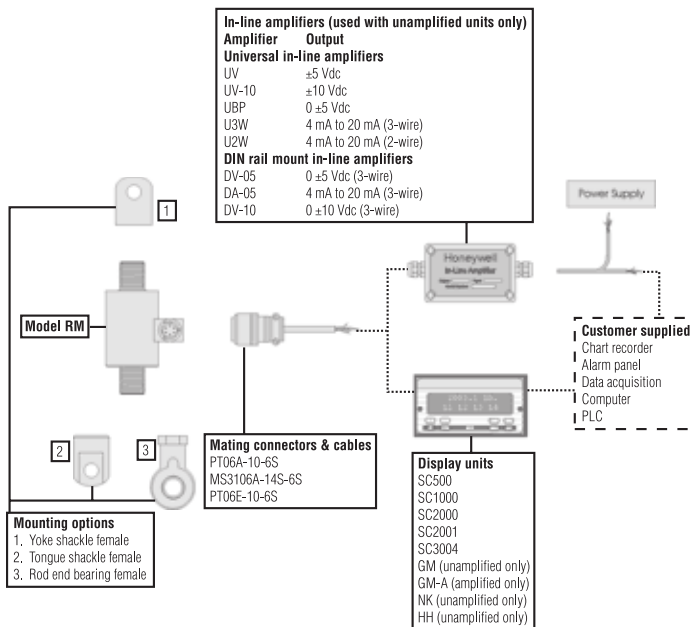

NON-STANDARD RANGES - ORDER CODE AL411

Range (lb)	Thread type	D mm [in]	L1 mm [in]	L2 mm [in]
75000 to 100000	2 1/2-12 UNF	88,9 [3.50]	101,6 [4.00]	76,2 [3.00]
150000 to 200000	3 1/2-8 UNF	114,3 [4.50]	127 [5.00]	101,6 [4.00]

Model RM

Rod End In-Line Tension Load Cell

NOTES

1. Allowable maximum loads – maximum load to be applied without damage.²
2. Without damage - loading to this level will not cause excessive zero shift or performance degradation. The user must consider fatigue life for long term use and structural integrity. All structurally critical applications (overhead loading, etc.) should always be designed with safety redundant load paths.
3. Interconnecting shunt cal. 1 terminal with shunt cal. 2 terminal provides 50 % (unamplified units), 75 % (4 mA to 20 mA three-wire units) or 80 % (voltage amplified units) of full scale output for quick calibration. Shunt calibration comes standard with internal amplifier option 2a, 2b, 2c, 2t and 2j.
4. O=Orange; Y=Yellow; B=Blue; Bl=Black; R=Red; Br=Brown; W=White; G=Green. Color specifying cable and number or letter specifying connector.
5. No mating connector necessary for cable option.
6. Cannot use with options 1c, 1e, 1f, 1g, 1h, or 1i.
7. Only available with option 2b or 2c.
8. Not available with amplified option.
9. Consult factory for TEDS availability with amplified models.
10. Termination dependent; consult factory.
11. This unit calibrated to Imperial (non-Metric) units.
12. 5000 ohm bridge required.

Find out more

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office. To learn more about Honeywell's test and measurement products, call **+1-614-850-5000**, visit **www.honeywell.com/sensotec**, or e-mail inquiries to **info.tm@honeywell.com**

Sensing and Control
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422
www.honeywell.com

Warranty. Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

WARNING

PERSONAL INJURY

- DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this datasheet is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.